


980 Instructions

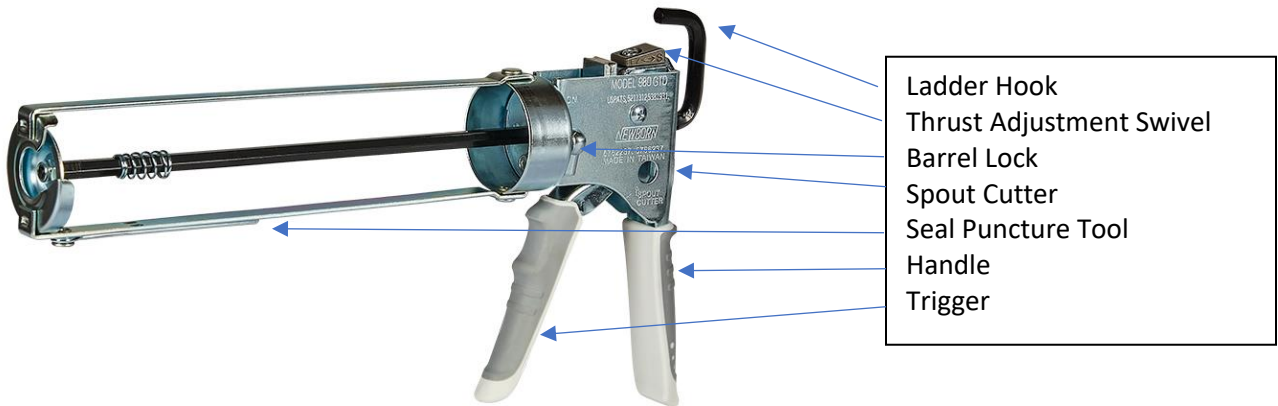

The 980-gtd is a drip-free on demand gun, the mechanism on the top with the EZ and the S swivels to change the thrust ratio.

"EZ" is the higher thrust 12:1 for thicker material and the "s" is standard 6:1 for thin material. Whichever "EZ or S" is closest to the friction plate is which setting it is on, rotate the adjustment knob 180

"on" or "off" is referring to barrel lock, "on" the barrel will not rotate, "off" the barrel rotates. The mechanism will not go flush but turn knob towards "on" until meet resistance this will lock the barrel in place.

To engage Drip-Free, release the front handle quickly. Slowly releasing the front trigger in a controlled way will maintain pressure on the sealant.

Drip-Free Testing:

make sure rod is all the way back do not squeeze fingers into front cap

Place your hand on the rail with your knuckles to the ceiling, just in front of the plunger.

Squeeze the trigger, the plunger should press on your fingers and retract slightly when you release the front trigger quickly.

