

# MODEL 850A75 PUSH DISK ALIGNMENT CHART


Your Model 850A75 comes with two (2) push disks only. If you need additional push disks for other mix ratios, contact your local distributor and ask for the disks you need (using the part numbers below) as well as a push disk wrench.

### Instructions for Removing Push Disks

1. Lay the airgun on a flat surface with the frame side away from you with handle upwards. If the push disks are completely retracted, push disks need to be brought out 2 to 3 inches. Insert the Push Disk Wrench (larger opening side) between push disk and cartridge stabilizing plate. Push the wrench toward the front plate to create an approximate 2-3" gap between the push disk and cartridge stabilizing plate.
2. Reverse the wrench and place the small opening on hex nut at the end of the push disk. Lean the wrench back toward the air cylinder and the disk will release.


### Instructions for Attaching Push Disks

1. Slide push disk on the end of the correct piston rod as shown below. Push until it snaps in.
2. Make sure all arrows are pointing as shown below. May need to wiggle back and forth after snap in.




PUSH DISK WRENCH

**IMPORTANT:**  
Looking from the **OUTSIDE** of your Model 850A75, the **ARROW MARKS** on the disks should be aligned as shown.




FRONT PLATE

### 750 ml x 750 ml

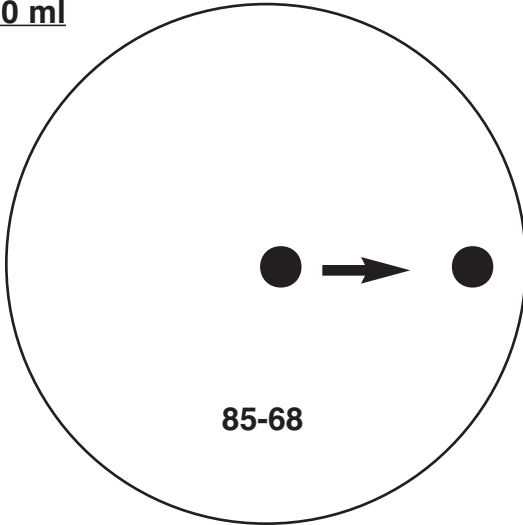


85-68

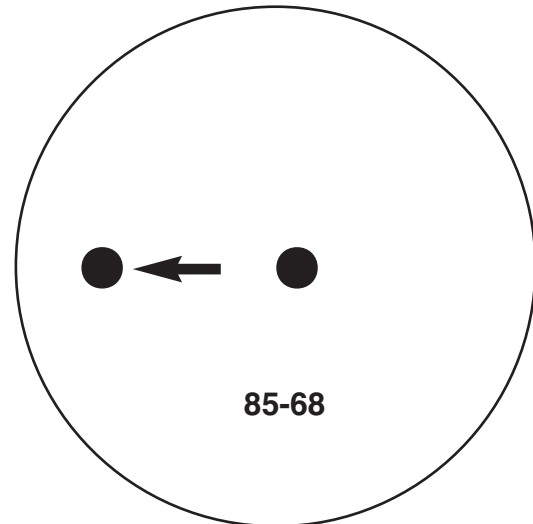


85-68

### 600 ml x 600 ml

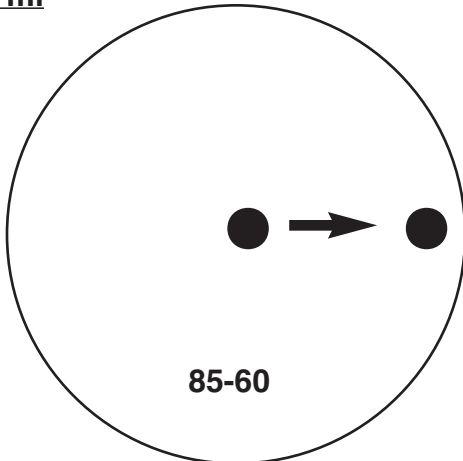

85-60


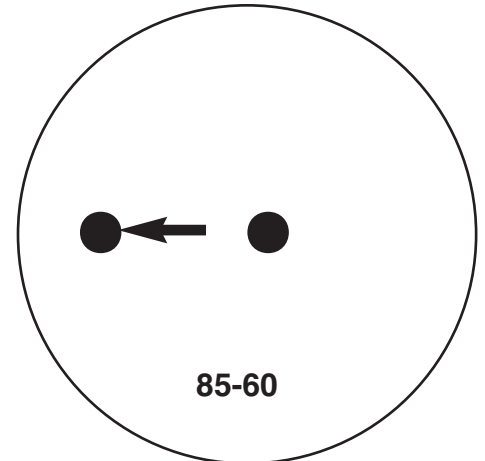


85-60



**NOTE:** Warranty is voided if instructions are not directly followed

Continued on Reverse Side

**750 ml x 300 ml**


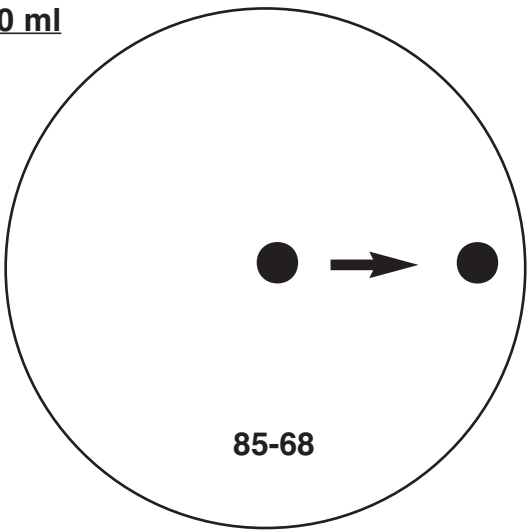


**750 ml x 75 ml**

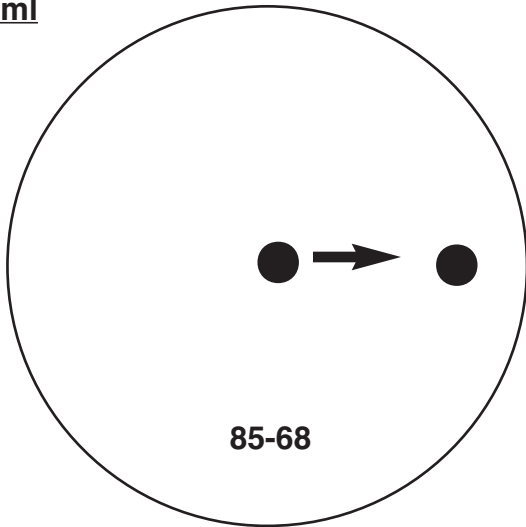

**85-19**

**600 ml x 300 ml**

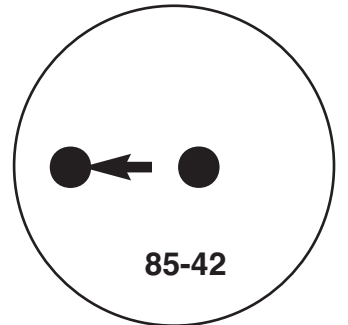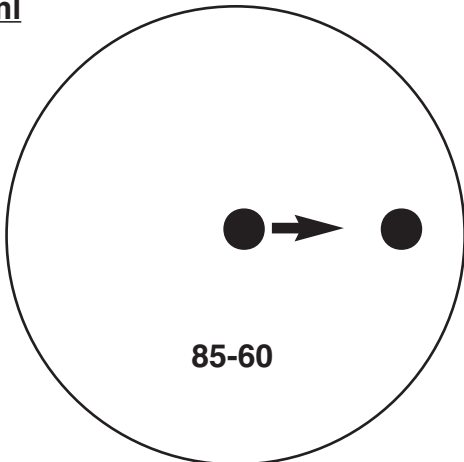

**300 ml x 300 ml**

